

Specifications

Speaker	Coaxial 2-way: Woofers 10 cm, PP, cone type Tweeter 2.8 cm, PET, dome type
Peak power	120 W
Rated power	20 W
Impedance	4 Ω
Sensitivity	88 dB/W/m
Frequency response	45 – 22,000 Hz
Mass	Approx. 340 g per speaker
Supplied accessory	Parts for installation

Design and specifications are subject to change without notice.


Precautions

- Do not continuously use the speaker system beyond the peak power handling capacity.
- Keep recorded tapes, watches, and personal credit cards using magnetic coding away from the speaker system to protect them from damage caused by the magnets in the speakers.

If you cannot find an appropriate mounting location, consult your car dealer or your nearest Sony dealer before mounting.

10cm Coaxial 2-way Speaker

Installation/Connections

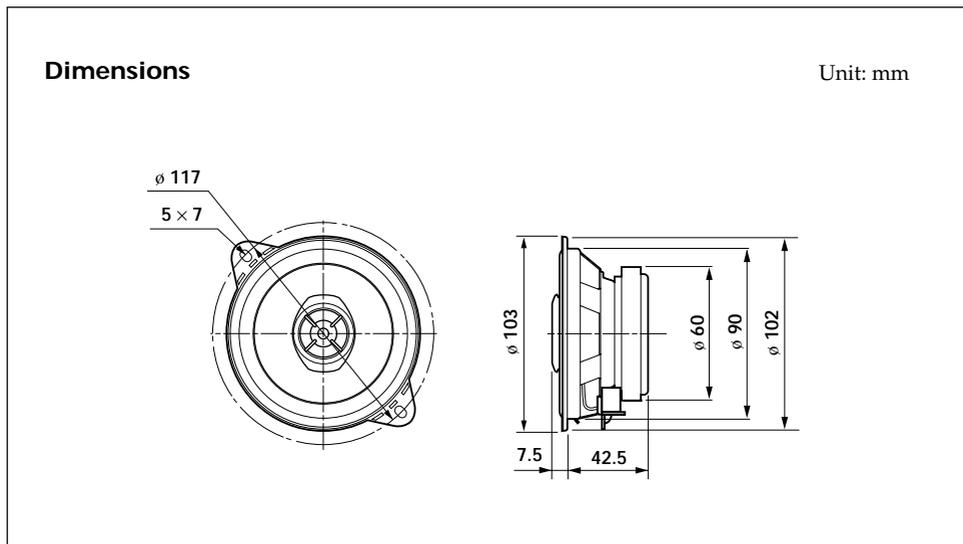


Mounting

Before mounting

A depth of at least 43 mm is required for flush mounting. Measure the depth of the area where you are to mount the speaker, and ensure that the speaker is not obstructing any other components of the car. Keep the following in mind when choosing a mounting location:


- Make sure that nothing is obstructing around the mounting location of the door (front or rear) where you are to mount the speaker.
- A hole for mounting may already be cut out of the inner panel of the door (front or rear). In this case, you need to modify the board only.
- If you are to mount this speaker system in the door (front or rear), make sure that the speaker terminals, frame or magnet do not interfere with any inner parts, such as the window mechanism in the door (when you open or close the window), etc. Also make sure that the speaker grille does not touch any inner fittings, such as the window cranks, door handles, arm rests, door pockets, lamps or seats etc.

Parts list

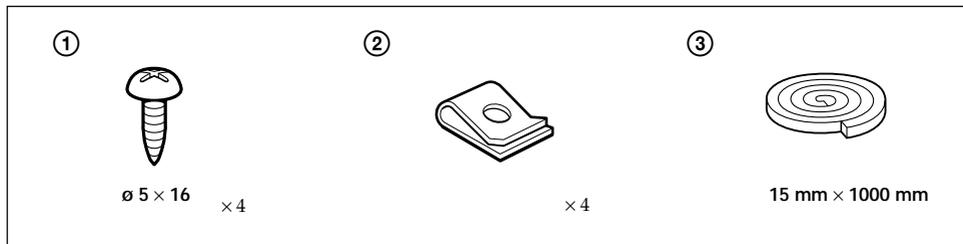

Flat mounting (installed flush with the surface of the dash)

1

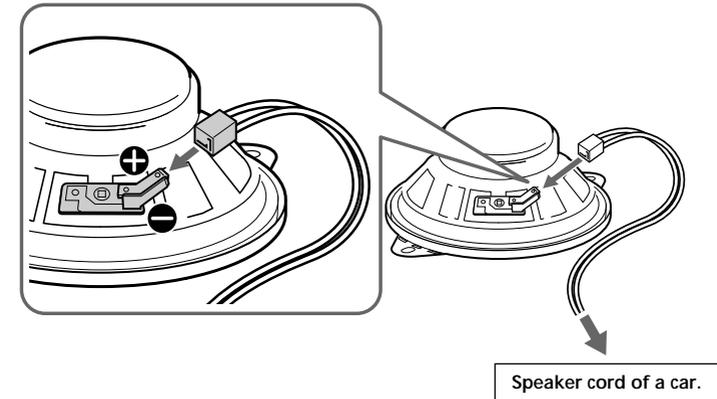

2

